

## SPECIFICATION

Comply with DIN 3352 F4

METAL SEATED, RISING STEM, OUTSIDE SCREW AND YOKE.

DIN 3352 (F4). FLANGED TO BS 4504 PN10/16, JIS10K, ANSI Class 125.

### PRESSURE/TEMPERATURE RATING

Working pressure	16 bar
Testing Pressure	Shell: 24 bar, Seat: 17.6 bar
Working temperature	-10°C to 120°C
Suitable Media	

### MATERIALS

Part	Material	EN Spec.
Body	Ductile Iron	EN-JS1050
Bonnet	Ductile Iron	EN-JS1050
Disc	Ductile Iron	EN-JS1050
Seat/Holding Ring	Brass	EN 12165 W603N
Stem/bolt/nut	Stainless steel	BS970 420S37
O/Dust Ring	Graphite	Non-Asbestos
Hand-wheel	Cast iron	EN-JL1040
Painting	Red Epoxy Power Coating	

### DIMENSIONS

Nominal				Nominal			
Size mm	L mm	H mm	D mm	Size mm	L mm	H mm	D mm
40	140	295	160	150	210	711	250
50	150	315	160	200	230	900	250
65	170	371	160	250	250	1093	320
80	180	424	200	300	270	1273	320
100	190	500	200	350	290	1500	400
125	200	598	200	400	310	1820	500

#### Note:

1. L: Face to face, H: Flange central to top.
2. JIS B2043 10K and other flange standards available upon request.
3. If used for gas application, please consult our sales office.
4. Design and specifications are subject to change without prior notice.

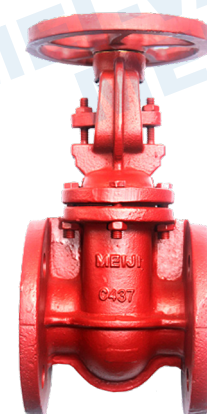


Fig. 206



Fig. 206S

